

Ampacoll® DT

▶ Mounting tape for dry construction




internal

- ▶ Double-sided adhesive – for rapid assembly without stapling
- ▶ No chewing gum effect, thanks to stable scrim structure

Ampacoll® DT

with double-sided adhesive

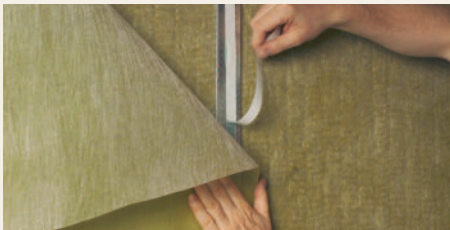

Roll dimensions

Length: 50 m / Width: 20 mm / Thickness: 0,3 mm

Box contents

12 rolls = 600 m¹

Pallet details

28 boxes = 16'800 m¹


Specifications:

Storage time	2 years
Processing temperature	from -5 °C
Temperature resistance	-40 to +80 °C

10

Jahre Garantie*
Ans Garantie
Anni Garanzia
Years Warranty

* Security is part of the system at Ampack. We cover the cost of removal and replacement, and consequential damage, as well as the replacement materials.

 ISO 9001:2008
Swiss Research



Optimized for use with the following materials:

- ▶ Vapor barriers and seals
- ▶ Planed timber
- ▶ OSB boards
- ▶ Chipboard
- ▶ Gypsum plasterboard *
- ▶ Gypsum fiberboard *
- ▶ Metals (aluminum, steel, etc.)
- ▶ Polythene components (e.g. paneling)
- ▶ PVC components (e.g. windows)

* always use primer

Processing tips

The surfaces to be bonded must be clean, dry and free of dust and grease.

Product Information

Double-sided adhesive mounting tape with a blue lattice insert and a solvent-free adhesive. For safe, durable fixing of vapor barriers and vapor seals on a firm substrate, without stapling. Also suitable for damp protected bonding of roof and wall membranes.

MAR2010

This paper can become invalid if new knowledge is acquired or new developments are made.
Currently valid informations are available at www.ampack.eu © Ampack AG, Rorschach, 01.2010

Ampack AG
Seebleichstrasse 50
CH-9401 Rorschach
Phone +41 (0)71 858 38 00
Fax +41 (0)71 858 38 37
ampack@ampack.ch
www.ampack.eu

