

# Ampacoll® Sillskin

Butyl rubber sheet for covering parapets and to create window sill.



- **> 300 % expandability**
- **Separate liner to facilitate mounting on windows**
- **Easy unrolling thanks to robust cardboard rolls**
- **Highly flexible – follows component movement**
- **Permanently elastic, does not become brittle**

## Technical details

Basis	Pure grade butyl rubber
Storage time	2 years
Storage	Cool and dry, frost-free, and out of direct sunlight
Processing temperature	from 0°C
Temperature stability	– 40 to +90°C
Resistance to ageing	> 20 years
Elasticity	> 300 %
Outdoor weathering	3 months

# 10

Jahre Garantie  
Ans Garantie  
Anni Garanzia  
Years Warranty


Security is part of the system at Ampack. We not only cover the cost of the materials, but also the installation and removal costs.

 **ISO 9001:2008**  
Swiss Research

**Field of application:** Self-adhesive, highly elastic butyl rubber strip that can be used to cover parapets in wooden buildings under construction (until the windows are installed) or for the watertight formation of windowsills. Also ideal for bridging large joints.

## Forms of delivery

Article number	Description	Roll dimensions	Box contents
7640115536297	Ampacoll® Sillskin 150	20 m × 150 mm	1 roll
7640115536310	Ampacoll® Sillskin 200	20 m × 200 mm	1 roll
7640115536334	Ampacoll® Sillskin 300	20 m × 300 mm	1 roll

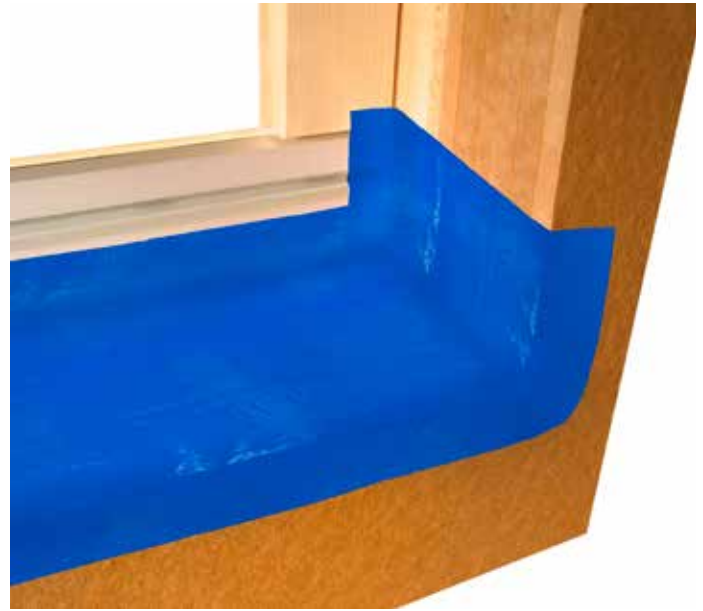

**Other window installation products:**



**Ampacoll® FE:**  
Window installation tape for wooden constructions

Internal



**Ampacoll® F:**  
Window installation tape for concrete and masonry

Internal



**Ampacoll® BKF:**  
Window installation tape for concrete and masonry

Internal

**Processing tips**

The **Ampacoll® Sillskin butyl tape** can be used for a variety of applications. It serves as a means of covering parapets during construction phases and can also be used as a permanent underlayment for windowsills.

Large seams can also be conveniently covered with the tape. The tape's high quality butyl material ensures excellent elastic properties. This enables you to accurately cover tricky locations and surfaces such

as corners. Please refer to our user instructions for details on the use of the product.



Note the application guidelines and other system products in our adhesive matrix.



For more detailed information and documents see [www.ampack.eu](http://www.ampack.eu)



Questions regarding applications  
Tel.: +41 (0)71 858 38 00  
Fax: +41 (0)71 858 38 37

Sales through dealers

This data may become invalid as a result of new information or development.  
Current information can be found at [www.ampack.eu](http://www.ampack.eu) © Ampack AG, Rorschach, 05.2016

**www.ampack.eu**  
Ampack Switzerland: 071 858 38 00  
Ampack Austria: 05523 53433  
Ampack Germany: 07621 1610264  
Ampack France: 04 50 83 70 54  
Ampack Italy: 0471 053 475

