

## Back to Earth SW Ltd

7 Tuns Lane  
Silverton, Exeter  
Devon. EX5 4HY

### Project Information

Reference

Date 14 September 2018

### Construction Type

Element : Wall - 0 Spec generator copies

Internal surface emissivity : High External surface emissivity : High

	Thickness (mm)	Thermal Conductivity (W/mK)	Thermal Resistance (m <sup>2</sup> K/W)	Pitch (°)	Bridge details Air gaps (Level, Delta U")
Outside surface resistance	-	-	0.130		
Render, lime-sand	7.0	0.800	0.009		
Diffutherm	120.0	0.043	2.750		L:0 0.000W/m <sup>2</sup> K
Render, lime-sand	15.0	0.800	0.019		
Brick inner leaf	225.0	0.560	0.402		
Render, lime-sand	25.0	0.800	0.031		
Inside surface resistance	-	-	0.130		

**Total thickness 392.0mm**

**U-value = 0.29W/m<sup>2</sup>K**

U-value, Combined Method : 0.288W/m<sup>2</sup>K (upper/lower limit 3.471 / 3.471m<sup>2</sup>K/W, dUf 0.0000, dUg 0.0000, dUp0.0000, dUr0.0000, dUrc1 0.0000, dUrc2 0.0000)

### Correction factors

Air gaps, Delta Ug = 0.000W/m<sup>2</sup>K

	Thickness (mm)	Thermal Conductivity (W/mK)	Thermal Resistance (m <sup>2</sup> K/W)	Vapour Resistivity (MNs/gm)	Vapour Resistance (MNs/g)
Outside surface resistance	-	-	0.130	-	-
Render, lime-sand	7.0	0.800	0.009	50.00	0.35
Diffutherm	120.0	0.043	2.750	25.00	3.00
Render, lime-sand	15.0	0.800	0.019	50.00	0.75
Brick inner leaf	225.0	0.560	0.402	50.00	11.25
Render, lime-sand	25.0	0.800	0.031	50.00	1.25
Inside surface resistance	-	-	0.130	-	-
<b>Total thickness</b>	<b>392.0mm</b>				

Structure element : Wall  
Condensation calculations performed in accordance with BS5250:2011

**Condensation is occurring at the following layers interfaces:-**

Month	Int (C°)	Int (%RH)	Ext (C°)	Ext (%RH)
Jan	21.00	54.70	3.50	86.00
Feb	21.00	53.80	3.80	82.50
Mar	21.00	53.90	5.70	80.00
Apr	21.00	54.40	8.00	77.00
May	21.00	57.90	11.30	77.00
Jun	21.00	62.20	14.40	76.00
Jul	21.00	66.80	16.50	76.50
Aug	21.00	67.40	16.10	78.50
Sep	21.00	64.60	13.80	81.50
Oct	21.00	60.80	10.70	84.00
Nov	21.00	56.50	6.40	85.50
Dec	21.00	55.50	4.50	86.50

Gc = Monthly moisture accumulation per area at an interface

Ma = Accumulated moisture content per area at an interface

Peak accumulated moisture content per area at interface (Ma) = 0.00000 Kg/m<sup>2</sup>

Annual moisture accumulation = 0.00000 Kg/m<sup>2</sup>

**Project Information**

Reference

Date 14 September 2018

**Thermal Mass Details**

	Thickness assessed (actual) (mm)	Density (kg/m <sup>3</sup> )	Specific heat capacity (J/kgK)	Heat capacity (kJ/m <sup>2</sup> K)
Render, lime-sand	0.0 (7.0)	1600.0	1000.0	0.0
Diffutherm	0.0 (120.0)	190.0	2100.0	0.0
Render, lime-sand	0.0 (15.0)	1600.0	1000.0	0.0
Brick inner leaf	75.0 (225.0)	1700.0	840.0	107100000.0
Render, lime-sand	25.0 (25.0)	1600.0	1000.0	40000000.0
Total				147100000.0
kappa value				147.1000
Limiting condition:	100mm in			

Admittance : 4.39 W/m<sup>2</sup>K    Decrement : 0.06 factor    Decrement delay : -17.37 hours


**Condensation Risk Analysis (no account taken of thermal bridges)**

**3 - Dwellings with low occupancy**

Jan (worst)	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
21.0C 54.7%	21.0C 53.8%	21.0C 53.9%	21.0C 54.4%	21.0C 57.9%	21.0C 62.2%	21.0C 66.8%	21.0C 67.4%	21.0C 64.6%	21.0C 60.8%	21.0C 56.5%	21.0C 55.5%
3.5C 86.0%	3.8C 82.5%	5.7C 80.0%	8.0C 77.0%	11.3C 77.0%	14.4C 76.0%	16.5C 76.5%	16.1C 78.5%	13.8C 81.5%	10.7C 84.0%	6.4C 85.5%	4.5C 86.5%

	Interface Temp. °C	Dewpoint Temp. °C	Vapour Pressure (kPa)	Saturated V.P. (kPa)	Worst Cond. (g/m <sup>2</sup> )	Peak Buildup (g/m <sup>2</sup> )	Condensation
1 Outside surface resistance							
2 Render, lime-sand	4.2	1.4	0.67	0.82			No
3 Diffutherm	4.2	1.7	0.69	0.82			No
4 Render, lime-sand	18.3	4.0	0.81	2.10			No
5 Brick inner leaf	18.4	4.5	0.84	2.11			No
6 Render, lime-sand	20.4	11.0	1.31	2.39			No
7 Inside surface resistance	20.6	11.5	1.36	2.42			No

Worst case internal / external conditions for graph : 21.0°C @ 54.7%RH / 3.5°C @ 86.0%RH

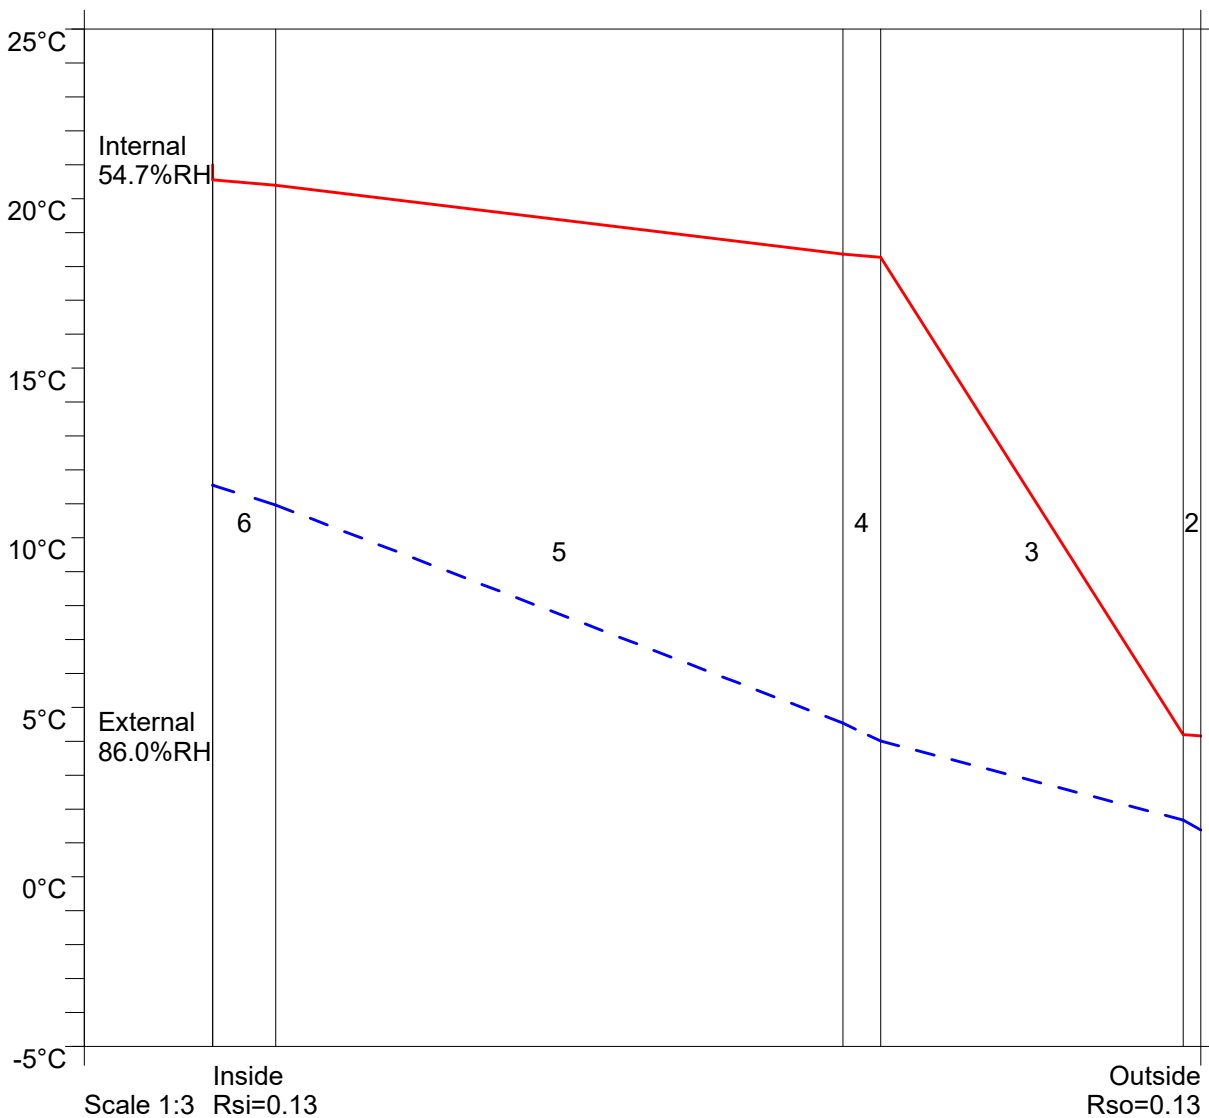

### Condensation Risk Analysis (no account taken of thermal bridges)

#### 3 - Dwellings with low occupancy

Jan (worst)	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
21.0C 54.7%	21.0C 53.8%	21.0C 53.9%	21.0C 54.4%	21.0C 57.9%	21.0C 62.2%	21.0C 66.8%	21.0C 67.4%	21.0C 64.6%	21.0C 60.8%	21.0C 56.5%	21.0C 55.5%
3.5C 86.0%	3.8C 82.5%	5.7C 80.0%	8.0C 77.0%	11.3C 77.0%	14.4C 76.0%	16.5C 76.5%	16.1C 78.5%	13.8C 81.5%	10.7C 84.0%	6.4C 85.5%	4.5C 86.5%

	Interface Temp. °C	Dewpoint Temp. °C	Vapour Pressure (kPa)	Saturated V.P. (kPa)	Worst Cond. (g/m <sup>2</sup> )	Peak Buildup (g/m <sup>2</sup> )	Condensation
1 Outside surface resistance							
2 Render, lime-sand	16.7	12.4	1.44	1.90			No
3 Diffutherm	16.7	12.4	1.44	1.90			No
4 Render, lime-sand	20.3	12.8	1.48	2.38			No
5 Brick inner leaf	20.3	12.9	1.49	2.38			No
6 Render, lime-sand	20.8	14.4	1.64	2.46			No
7 Inside surface resistance	20.9	14.6	1.66	2.47			No

Worst case internal / external conditions for graph : 21.0°C @ 66.8%RH / 16.5°C @ 76.5%RH

