

Back to Earth SW Ltd

7 Tuns Lane
Silverton
Exeter
EX5 4HY

Project Information

Reference

Date 22 November 2023

Construction Type

Element : Wall - Wall-CLT-100mm-Clad

Internal surface emissivity : High External surface emissivity : High

	Thickness (mm)	Thermal Conductivity (W/mK)	Thermal Resistance (m ² K/W)	Pitch (°)	Bridge details Air gaps (Level, Delta U")
Outside surface resistance	-	-	0.040		
Ampatop Protecta	-	-	-		
Beltermo Ultra	60.0	0.042	1.400		L:0 0.000W/m ² K
UdiTHERM	160.0	0.038	4.200		L:0 0.000W/m ² K
Ampatex Solero	-	-	-		
Timber (500 kg/m ³)	100.0	0.130	0.769		
Inside surface resistance	-	-	0.130		
Total thickness	320.0mm				

U-value = 0.18W/m²K

U-value, Combined Method : 0.178W/m²K (upper/lower limit 6.539 / 6.539m²K/W, dUf 0.0255, dUg 0.0000, dUp0.0000, dUr0.0000, dUrc1 0.0000, dUrc2 0.0000)

Correction factors

Mechanical fasteners :-

Warm pitched roof - insulation over rafters

Alpha : 0.80 per m lambda f : 50.0000W/mK nf : 6.700 per m² Af : 28.500mm² Recess : 0.0mm

Delta Uf for Beltermo Ultra : 0.0058

Warm pitched roof - insulation over rafters

Alpha : 0.80 per m lambda f : 50.0000W/mK nf : 6.700 per m² Af : 28.500mm² Recess : 0.0mm

Delta Uf for UdiTHERM : 0.0197

nf = fasteners per m² Af = fasteners cross-sectional area

Air gaps, Delta Ug = 0.000W/m²K

	Thickness (mm)	Thermal Conductivity (W/mK)	Thermal Resistance (m ² K/W)	Vapour Resistivity (MNs/gm)	Vapour Resistance (MNs/g)
Outside surface resistance	-	-	0.040	-	-
Ampatop Protecta	-	-	-	-	0.50
Beltermo Ultra	60.0	0.042	1.400	15.00	0.90
UdiTHERM	160.0	0.038	4.200	25.00	4.00
Ampatex Solero	-	-	-	-	25.00
Timber (500 kg/m ³)	100.0	0.130	0.769	250.00	25.00
Inside surface resistance	-	-	0.130	-	-
Total thickness	320.0mm				

Structure element : Wall
Condensation calculations performed in accordance with BS5250:2021

Condensation is occurring at the following layers interfaces:-

Month	Int (C°)	Int (%RH)	Ext (C°)	Ext (%RH)
Jan	21.00	45.10	3.10	85.00
Feb	21.00	44.60	3.10	83.50
Mar	21.00	45.40	5.20	79.50
Apr	21.00	46.70	7.60	75.50
May	21.00	51.40	10.60	76.00
Jun	21.00	57.20	14.00	74.50
Jul	21.00	61.90	15.80	75.00
Aug	21.00	62.60	15.40	77.50
Sep	21.00	58.60	13.20	79.50
Oct	21.00	53.90	10.00	83.00
Nov	21.00	48.00	6.00	84.00
Dec	21.00	46.40	4.20	85.50

Gc = Monthly moisture accumulation per area at an interface

Ma = Accumulated moisture content per area at an interface

Peak accumulated moisture content per area at interface (Ma) = 0.00000 Kg/m²

Annual moisture accumulation = 0.00000 Kg/m²

Project Information

Reference

Date 22 November 2023

Thermal Mass Details

	Thickness assessed (actual) (mm)	Density (kg/m ³)	Specific heat capacity (J/kgK)	Heat capacity (kJ/m ² K)
Ampatop Protecta	0.0 (-)	300.0	850.0	0.0
Beltermo Ultra	0.0 (60.0)	180.0	2100.0	0.0
UdiTHERM	0.0 (160.0)	140.0	2100.0	0.0
Ampatex Solero	0.0 (-)	280.0	850.0	0.0
Timber (500 kg/m ³)	100.0 (100.0)	500.0	1600.0	8000000.0
Total				8000000.0
kappa value				80.0000
Limiting condition:	100mm in			

Admittance : 2.24 W/m²K Decrement : 0.08 factor Decrement delay : -17.98 hours


Condensation Risk Analysis (no account taken of thermal bridges)

2 - Offices, shops and dwellings with low occupancy

Jan (worst)	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
21.0C 45.1%	21.0C 44.6%	21.0C 45.4%	21.0C 46.7%	21.0C 51.4%	21.0C 57.2%	21.0C 61.9%	21.0C 62.6%	21.0C 58.6%	21.0C 53.9%	21.0C 48.0%	21.0C 46.4%
3.1C 85.0%	3.1C 83.5%	5.2C 79.5%	7.6C 75.5%	10.6C 76.0%	14.0C 74.5%	15.8C 75.0%	15.4C 77.5%	13.2C 79.5%	10.0C 83.0%	6.0C 84.0%	4.2C 85.5%

	Interface Temp. °C	Dewpoint Temp. °C	Vapour Pressure (kPa)	Saturated V.P. (kPa)	Worst Cond. (g/m ²)	Peak Buildup (g/m ²)	Conden-sation
1 Outside surface resistance							
2 Ampatop Protecta	3.2	0.8	0.65	0.77			No
3 Beltermo Ultra	3.2	0.9	0.65	0.77			No
4 UdiTHERM	7.1	1.1	0.66	1.01			No
5 Ampatex Solero	18.6	1.8	0.69	2.15			No
6 Timber (500 kg/m ³)	18.6	5.6	0.91	2.15			No
7 Inside surface resistance	20.8	8.7	1.12	2.45			No

Worst case internal / external conditions for graph : 21.0°C @ 45.1%RH / 3.1°C @ 85.0%RH

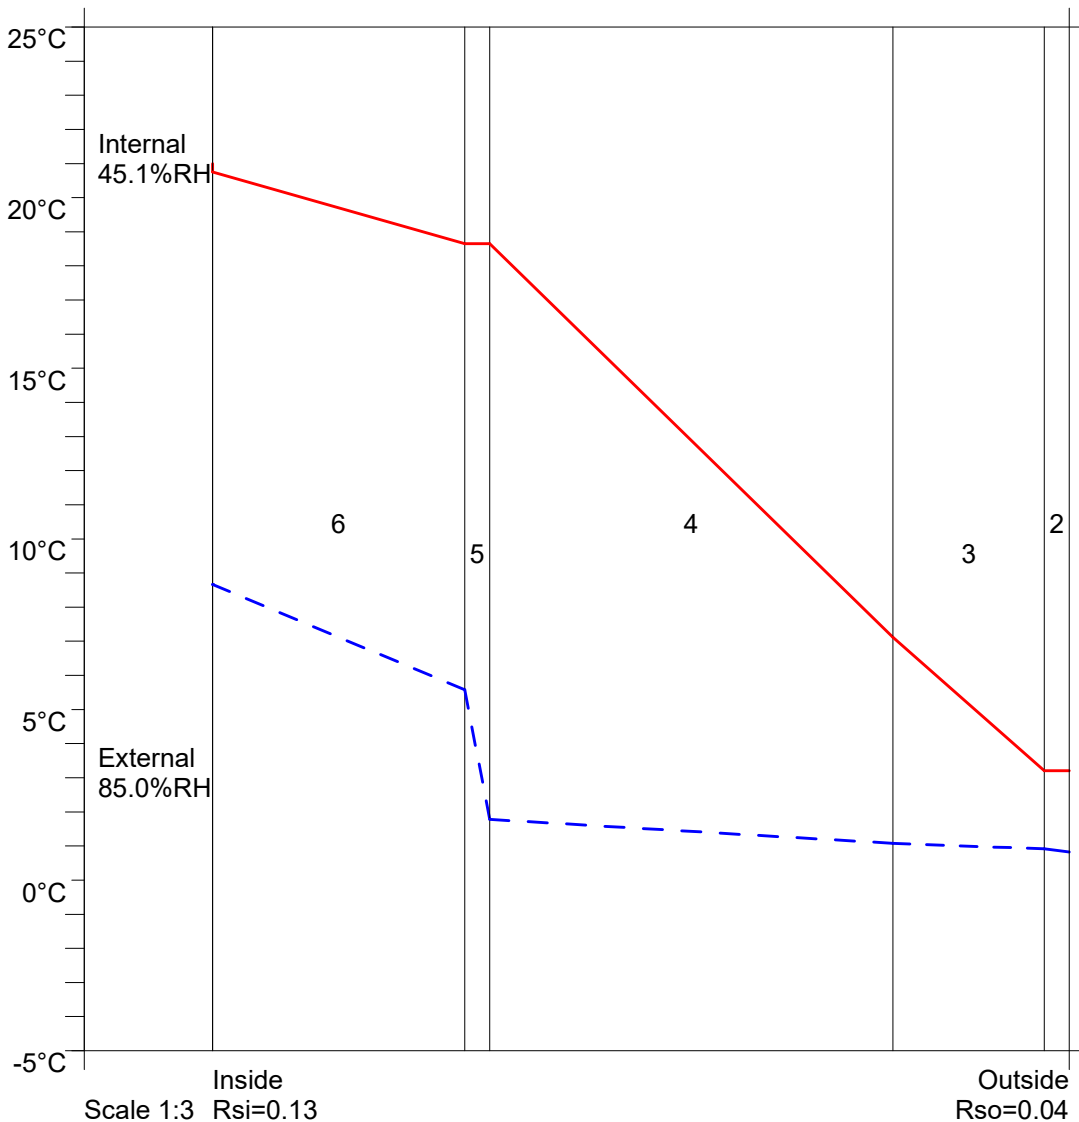

Condensation Risk Analysis (no account taken of thermal bridges)

2 - Offices, shops and dwellings with low occupancy

Jan (worst)	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
21.0C 45.1%	21.0C 44.6%	21.0C 45.4%	21.0C 46.7%	21.0C 51.4%	21.0C 57.2%	21.0C 61.9%	21.0C 62.6%	21.0C 58.6%	21.0C 53.9%	21.0C 48.0%	21.0C 46.4%
3.1C 85.0%	3.1C 83.5%	5.2C 79.5%	7.6C 75.5%	10.6C 76.0%	14.0C 74.5%	15.8C 75.0%	15.4C 77.5%	13.2C 79.5%	10.0C 83.0%	6.0C 84.0%	4.2C 85.5%

	Interface Temp. °C	Dewpoint Temp. °C	Vapour Pressure (kPa)	Saturated V.P. (kPa)	Worst Cond. (g/m ²)	Peak Buildup (g/m ²)	Conden-sation
1 Outside surface resistance							
2 Ampatop Protecta	15.8	11.4	1.35	1.80			No
3 Beltermo Ultra	15.8	11.4	1.35	1.80			No
4 UdiTHERM	17.0	11.4	1.35	1.93			No
5 Ampatex Solero	20.3	11.6	1.36	2.38			No
6 Timber (500 kg/m ³)	20.3	12.5	1.45	2.38			No
7 Inside surface resistance	20.9	13.4	1.54	2.47			No

Worst case internal / external conditions for graph : 21.0°C @ 61.9%RH / 15.8°C @ 75.0%RH

